

2MEGAPIXEL FULL HD 4 HIGH-POWER IR LED NETWORK PLASTIC DOME CAMERA

WIPF-V200D4




→ KEY FEATURES

- 1/2.8" 2Megapixel SONY CMOS Image Sensor
- 1080P@30fps High Resolution
- Megapixel Fixed Lens f=2.8mm
- High-Power IR LED 4ea (IR Distance : 20m)
- 2D+3D DNR (Digital Noise Reduction)
- WDR (Wide Dynamic Range)
- Defog
- Smart IR
- H.264 & H.264 & MJPEG Triple Stream
- CBR & VBR Modes
- ONVIF (Profile S)
- PoE : IEEE 802.3af
- Corridor View 90°/270°
- Tool-Free 3-Axis

→ DIMENSIONS

Unit : mm

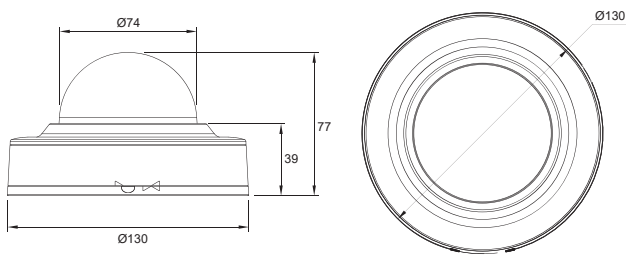

→ SPECIFICATIONS

| WIPF-V200D4 | | |
|-------------|-----------------------|---|
| Camera | Image Sensor | 1/2.8" 2Megapixel SONY CMOS Image Sensor |
| | Total Pixels | 2000(H) x 1121(V) = 2.24M (Pixels) |
| | Effective Pixels | 1984(H) x 1105(V) = 2.19M (Pixels) |
| | Scanning System | Progressive Scan |
| | S/N Ratio | More than 50dB |
| | Min. Illumination | 0Lux (IR LED On) |
| | Lens | Megapixel Fixed Lens f=2.8mm |
| | Angle of View | 84.4°(H) / 50.3°(V) / 104.6°(D) |
| | IR LED | 4ea (High-Power IR LED / Working Distance : 20m) |
| | Electronic Shutter | 1/30 ~ 1/10,000sec. |
| Video | Image Setting | Day & Night (Auto, Color, B/W) / WDR / 2D+3D DNR / Defog / Smart IR / Privacy Mask Effect - Color / Sharpness / Mirror & V-Flip / etc. |
| | Compress Format | H.264 & H.264 & MJPEG |
| | Resolution | Up to 1920x1080 |
| | Frame Rate | H.264 Up to 30fps with 1920x1080 MJPEG Up to 30fps with VGA Resolution |
| | Bit Rate Control | 100,000 ~ 8,000,000 bits/s |
| | Streaming | CVBR, VBR |
| | Protocol | HTTP, HTTPS, FTP, SMTP, UPnP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP |
| | ONVIF | Ver. 2.2 (Profile S) |
| | Security | Password Protection, User Access Log, HTTPS Encryption |
| | Intelligent Video | Motion Detection up to 1920x1080 with 12x12 Blocks |
| Network | Alarm Events | File Upload via FTP and E-mail / Notification via E-mail, FTP and TCP |
| | Remote Application | Web Viewer, Mobile Viewer, CMS, IP Installer |
| | Firmware Upgrade | Remote Upgrade via Network |
| | Simultaneous Access | 8 |
| | API | CGI Interface Document, ActiveX Interface (OCX(dll)+Document) |
| | Ethernet | RJ-45 (10/100 Base-T) |
| | Reset Button | 1ea (Factory Default) |
| | Status LED | Red : Power / Green : Network |
| | Power Source | DC 12V / 1.5A, PoE (IEEE 802.3af) |
| | Power Consumption | Max. 7W |
| Interface | Operating Temperature | -10°C ~ 50°C |
| | Storage Temperature | -20°C ~ 60°C |
| General | Operating Humidity | 10% ~ 90% |
| | Storage Humidity | 10% ~ 90% |
| | Dimension | 130(Ø) x 77(H)mm |
| | Weight | 290g |

• Design and specification are subject to change without notice.