

GIGABIT POE SWITCH (POE 8 PORT, NORMAL 2 PORT)

SFC400HP




→ KEY FEATURES

- PoE 8 Port & 10/100/1000Mbps Port (TP or SFP Port Support)
- Distance : 10/100/1000Mbps Full Duplex
- Web Based Management, SNMP Management
- Auto MDI/MDI-X Auto Sensing
- IGMP Snooping v1, v2 Support
- RSTP (Rapid Spanning Tree Protocol)
- SNMP Trap Message (Cold Start, Port Link, Power Status)

→ DIMENSIONS

Unit : mm

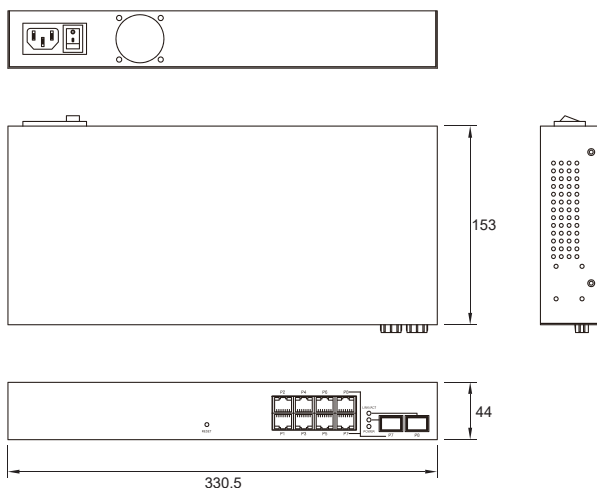

→ SPECIFICATIONS

SFC400HP		
Interface	Link Port	RJ-45 (Auto MDI / MDIX)
	Network Cable	CAT.5e over
	LED	Power, Link/Act, PoE On per port
PoE & Network	Output	IEEE 802.3af Standard (15.4W, 350mA)
		IEEE 802.3at Standard (30.8W, 590mA) (Max. 123.2W)
	Data Bandwidth	10/100/1000Mbps Full Duplex
	Distance	100m@CAT.5e
Lightning Protection Circuit		Built-in
Power In		AC 100~240V, 50/60Hz
Operating Temperature		0°C ~ 60°C
Storage Temperature		-20°C ~ 80°C
Humidity		5% ~ 95% (W/O Condensation)
Material		Aluminum
Dimension		330.5(W) x 44(H) x 153(D)mm
Weight		1.8kg

* Design and specification are subject to change without notice.