


NIGHT COLOR VIDEO 2.1MEGAPIXEL FULL HD BULLET CAMERA

IG-I200 (M)



NIGHT OUTDOOR VISIBILITY RANGE



Camera Status LED

→ KEY FEATURES

- 2.1Megapixel DARK IGUANA Sensor
- Full HD Resolution (1920x1080p/30fps)
- Provides Clear Color Images in Extreme Low Light Conditions
- Min. Illumination of 0.0000001Lux
- Megapixel Motorized Lens f=2.8~12.0mm
- 30fps WDR (Wide Dynamic Range)
- Various Video Output
(Default : EX-SDI, HD-SDI, SD / Option : AHD 2.0, TVI 2.0)
- Camera Status LED (Green : Stable / Red : Unstable (Under 10V))
- Built-in Powerful Surge Protection Circuit (ESD 15KV, Contact 8KV)
- UTC Support (EX-SDI, HD-SDI, AHD, TVI)
- 2D+3D DNR (Digital Noise Reduction)
- Sens-up
- Defog
- Lens Shading Compensation
- Privacy Mask
- OSD Control (Multi OSD Language)

→ LOW-LIGHT VIDEO




[General Camera]



[Dark Iguana Camera]

→ DIMENSIONS

Unit : mm

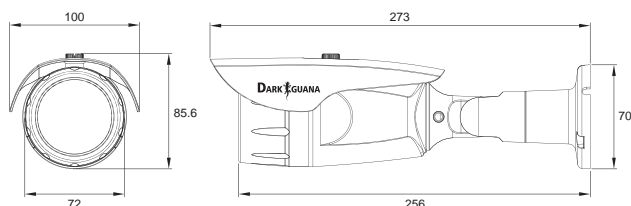

→ SPECIFICATIONS

| IG-I200 (M) | |
|-----------------------|--|
| Image Sensor | 2.1Megapixel DARK IGUANA Sensor |
| Total Pixels | 1945(H) x 1109(V) = 2.16M (Pixels) |
| Effective Pixels | 1937(H) x 1097(V) = 2.12M (Pixels) |
| Scanning System | 16:9 Progressive |
| Resolution | Digital : 1920x1080p (1080p/25,30fps) More than 1000TVL (1080p) |
| Video Output | Default : EX-SDI / HD-SDI / Analog NTSC, PAL (W/O WDR) Option : AHD 2.0 / TVI 2.0 |
| S/N Ratio | More than 52dB (AGC Off) |
| Min. Illumination | 0.0000001 Lux |
| Lens | Megapixel Motorized Lens f=2.8~12.0mm |
| Shutter Speed | Auto / Flicker / Manual (1/30(25) ~ 1/30,000sec.) |
| Sens-up | Off / x2 / x4 / x8 / x16 / x32 |
| White Balance | Auto / Autoext / Preset / Manual |
| Auto Gain Control | 0 ~ 10 |
| BLC | Off / HLC / BLC / WDR |
| D-WDR | On / Off |
| Day & Night | Auto / Color / BW / EXT. |
| 2D+3D DNR | Off / Low / Middle / High |
| Defog | On / Off |
| LSC | On / Off |
| Brightness | 0 ~ 20 |
| Sharpness | 0 ~ 10 |
| Privacy | On / Off (16 Points) |
| Motion Detection | On / Off |
| Mirror | On / Off |
| Flip | On / Off |
| OSD Language | English / Korean / Chinese / Japanese |
| Operating Temperature | -10°C ~ 50°C |
| Operating Humidity | 0% ~ 80% RH |
| Power Source | DC 12V (±10%) |
| Power Consumption | 2.88W |
| Dimension | 100(W) x 85.6(H) x 273(D)mm |
| Weight | Appx. 670g (W/ Sunshield) |

• Design and specification are subject to change without notice.